


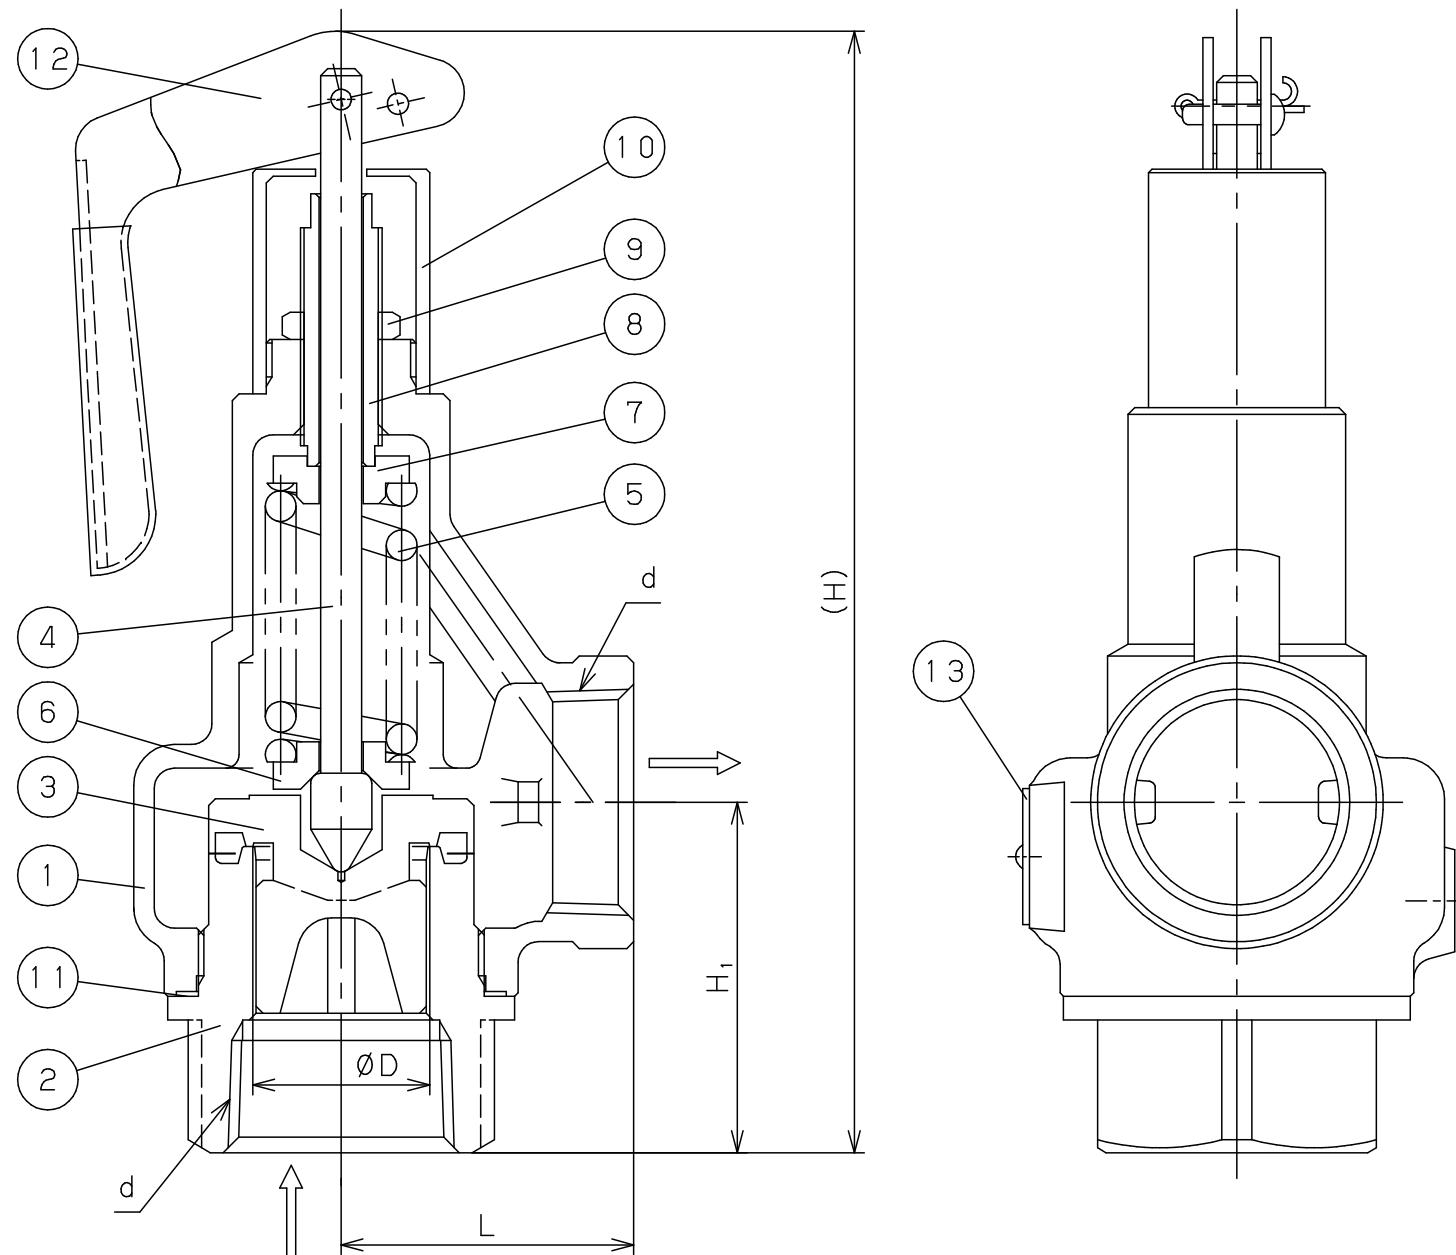

(mm)						
Size	d	D	L	H ₁	H	Weight (kg)
15A	Rc 1/2	16	34	40	148	0.8
20A	Rc 3/4	21	38	43	148	0.9
25A	Rc 1	26	43	52	165	1.2
32A	Rc 1 1/4	33	50	62	201	1.9
40A	Rc 1 1/2	41	60	60	226	2.9
50A	Rc 2	51	75	76	266	4.8

Specification	
Fluid	
Set Press.	MPa
Temp.	℃
Flow Rate	

13	Name Plate	Stainless Steel	銘板	SUS304	1
12	Lever	Stainless Steel & Rubber	レバー	SUS430 & ラバー	1
11	Gasket	PTFE	ガスケット	PTFE	1
10	Cap	Brass	キャップ	C3604	1
9	Lock Nut	Brass	ロックナット	C3604	1
8	Adjusting Screw	Brass	調節ねじ	C3604	1
7	Top Spring Plate	Brass	上部ばね受	C3604	1
6	Bottom Spring Plate	Brass	下部ばね受	C3604	1
5	Spring	Stainless Steel	調節ばね	SUS304	1
4	Spindle	Brass	弁棒	C3604	1
3	Valve	Cast Stainless Steel	弁体	SCS14A	1
2	Valve Seat	Cast Stainless Steel	弁座	SCS14A	1
1	Spring Case	Bronze	ばね箱	CAC406	1
No.	Name of Parts	Material	部 品 名	材 質	Q. TY

TYPE AL-150L SAFETY RELIEF VALVE
安全リリーフ弁

Approval	M. Kume
Check	M. Yoshida
Drawing	H. Okumura
Drawing No.	Y-1026-1901-1B
Date	8 DEC. 2011

